

GX Series


Indoor fixed mounted
LED display

The Most Cost-effective Indoor Fixed Display


- Any Size You Want
- Both vertical and horizontal
- Interactive Touch Display（optional）
- Ultra-light & Ultra-thin
- Perfect Flatness
- Redundancy on Power&Signal（optional）
- Easy Service and Maintenance
- Multiple Installation Methods
- Quick installation
- Inner and outer arc（optional）
- COT Protection（optional）
- High Brightness（optional）
- Application scenarios



Any Size You Want

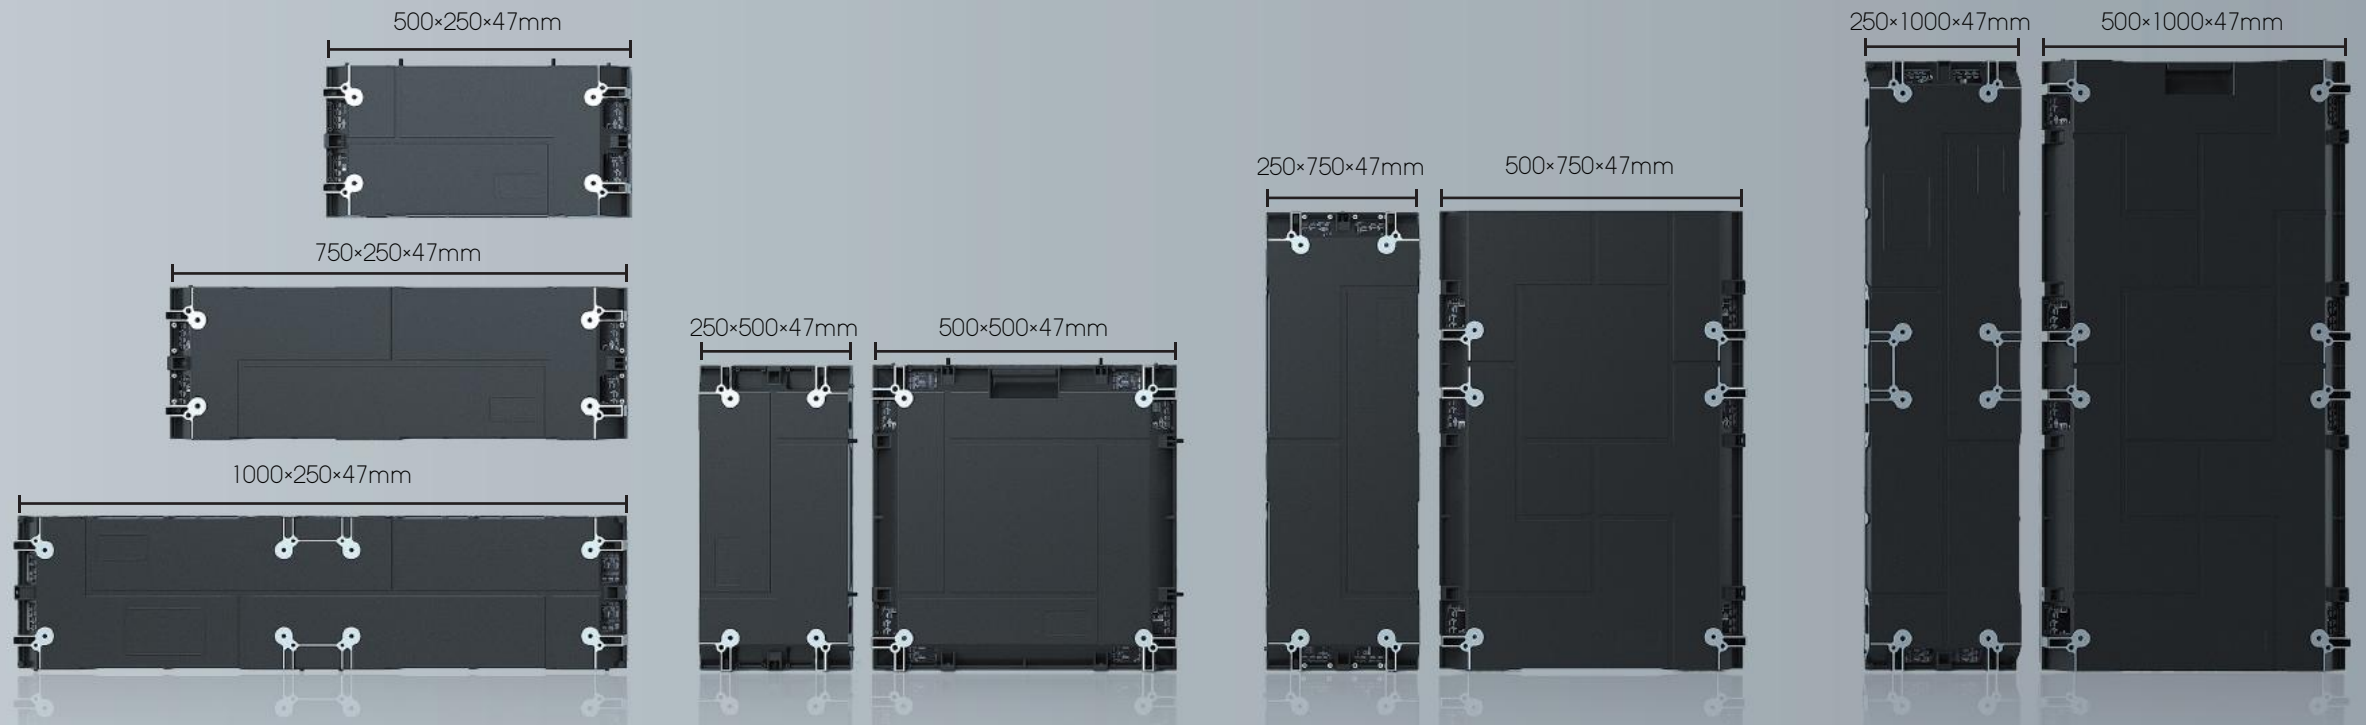

Both vertical and horizontal

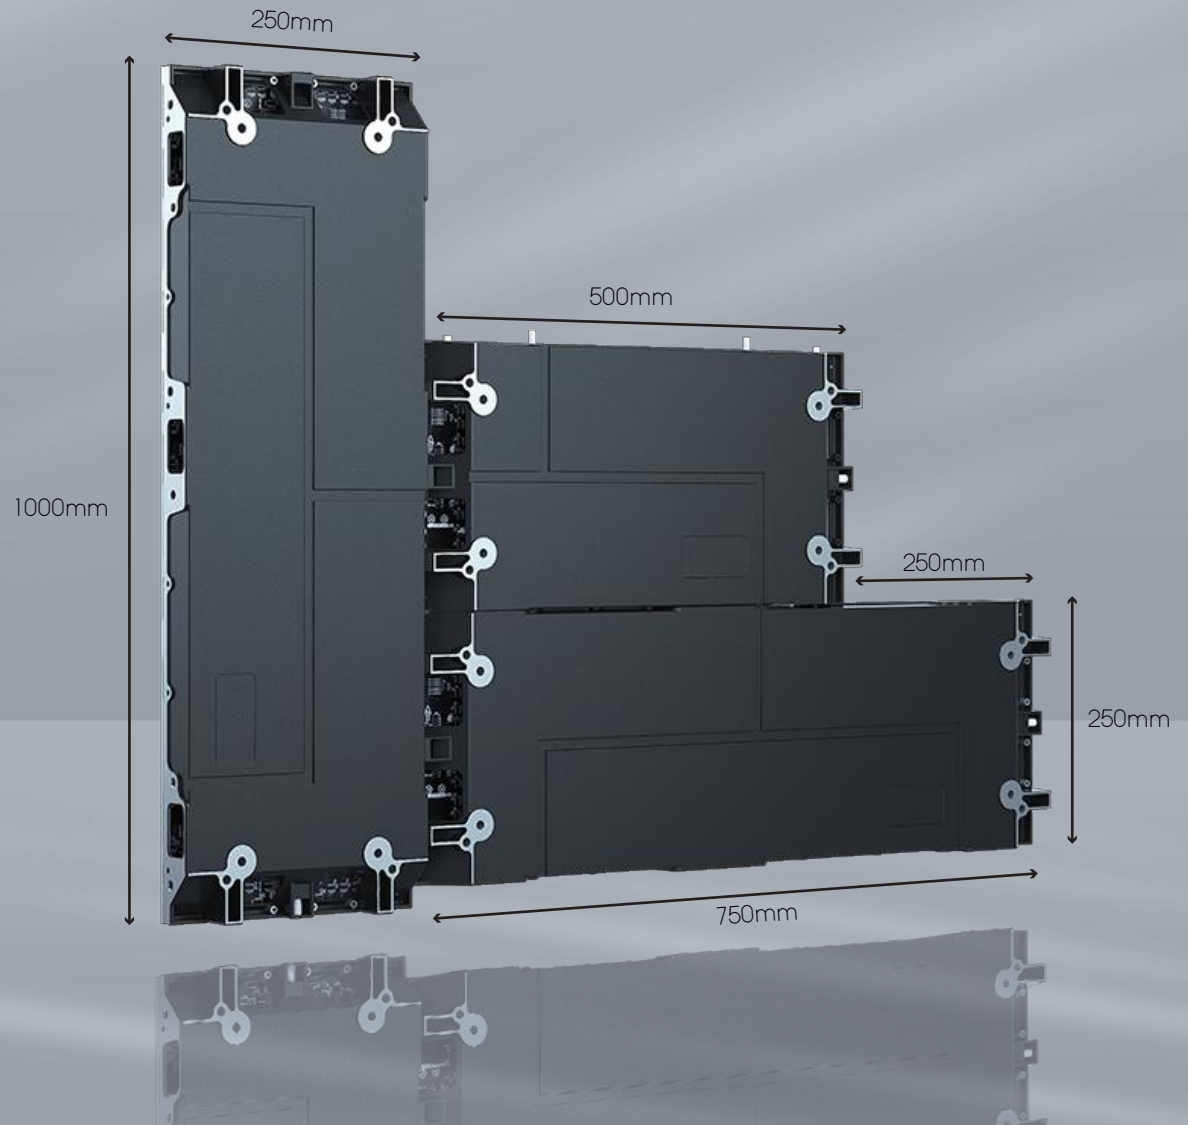



Interactive Touch Display （optional）

1.9/2.6 | 800nits | 0.01s | 256/m² | COT


Ultra-light & Ultra-thin





Perfect Flatness


Cabinets are made of die-cast aluminum
Modules adopts housing-free design

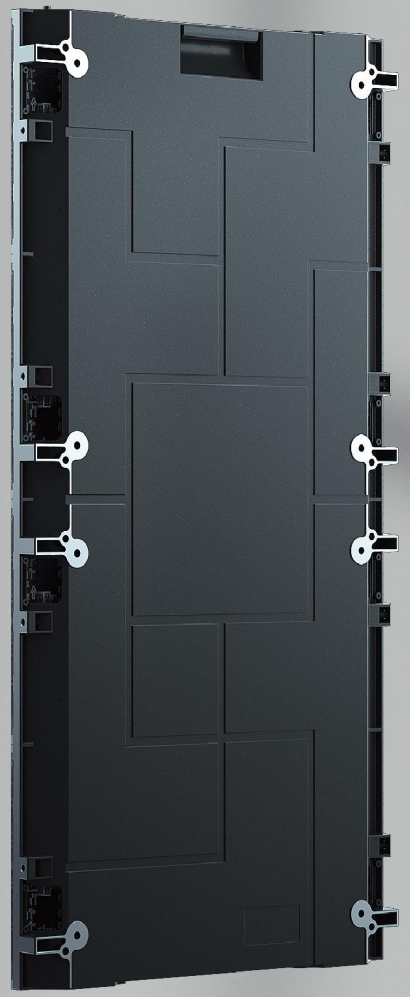







Redundancy on Power & Signal （optional）

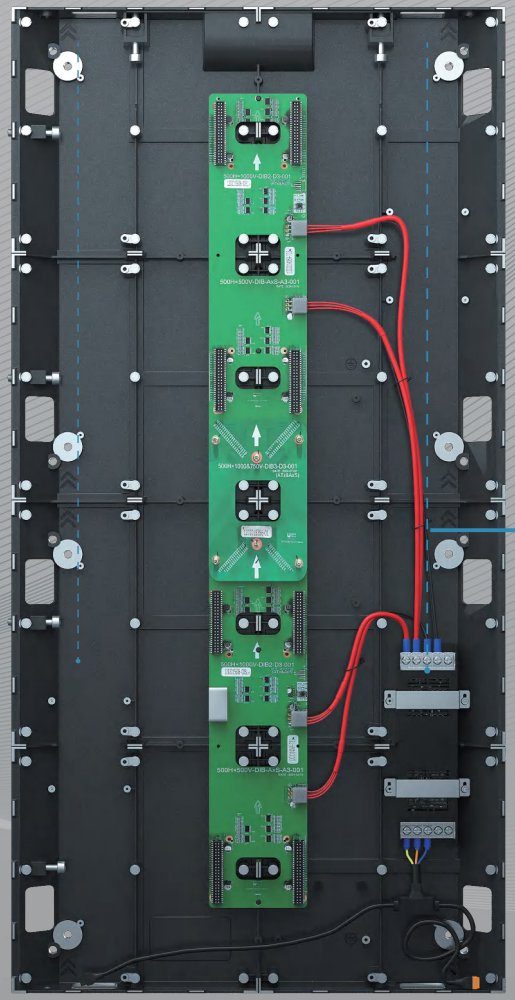


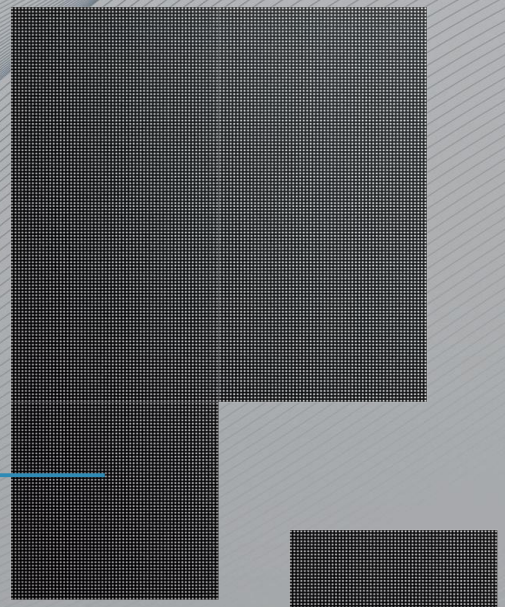




Intelligent Module
Automatic read of calibration data

Different modules

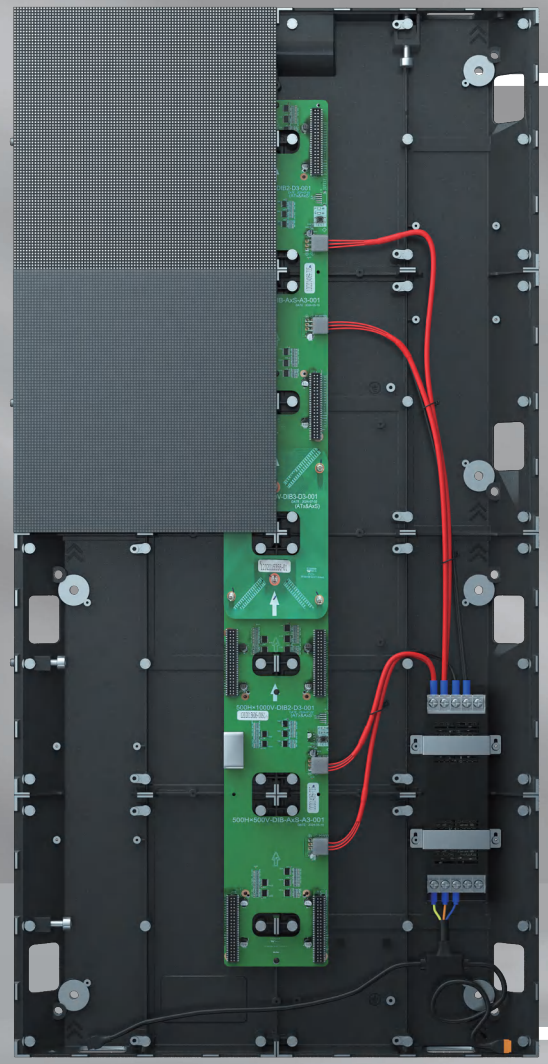

Easy Service and Maintenance

Hidden internal
cable routing

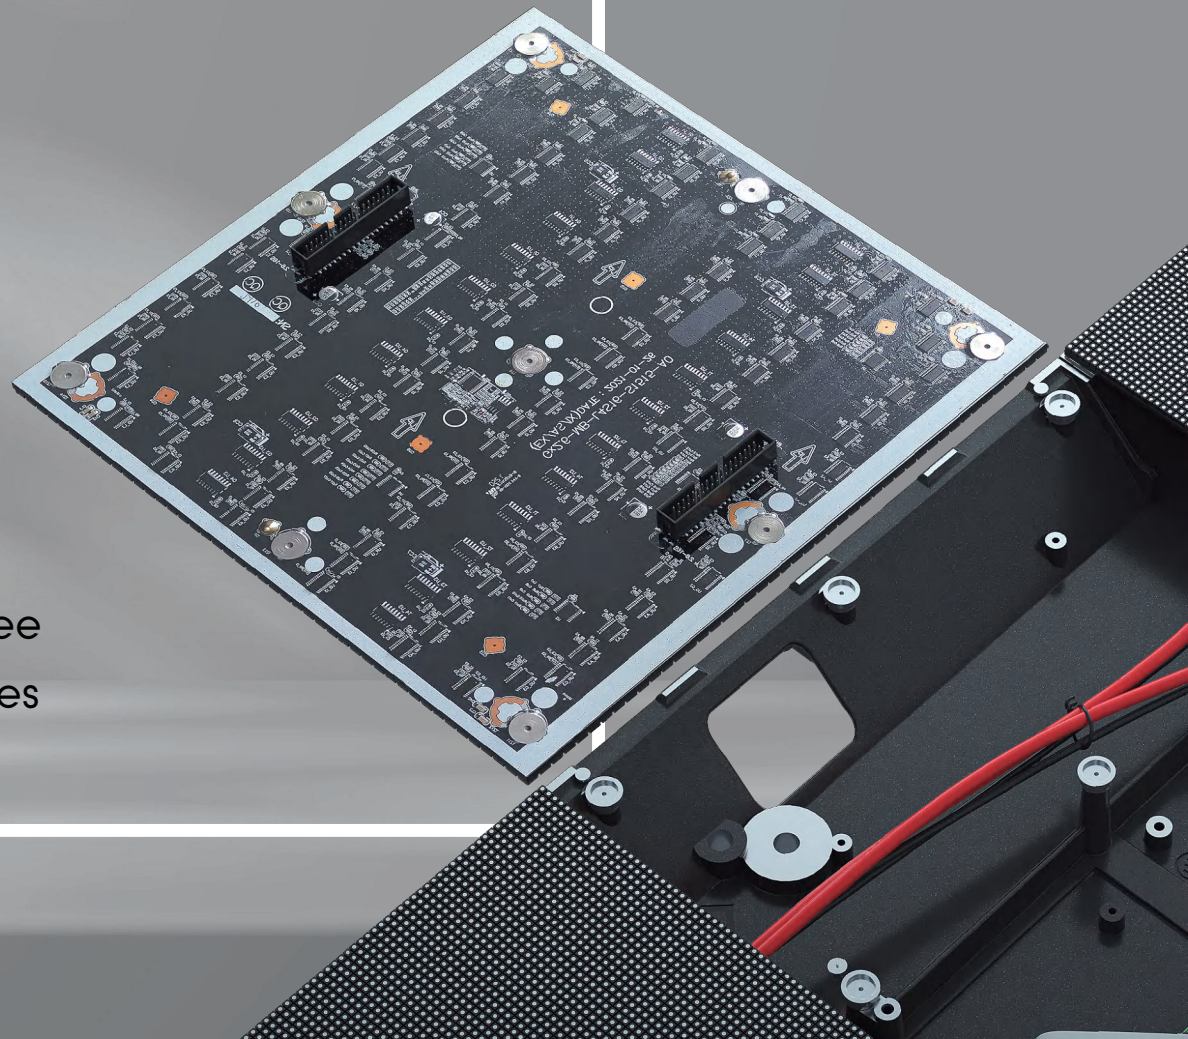


Hard connection, meaning free
of flat ribbon cables, guarantees
a fast service in seconds.


Multiple Installation Methods

Seamless right-angle installation




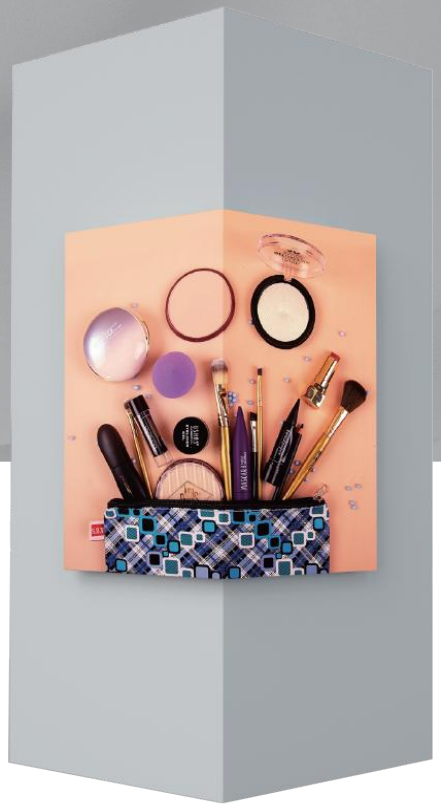

Cube mounting

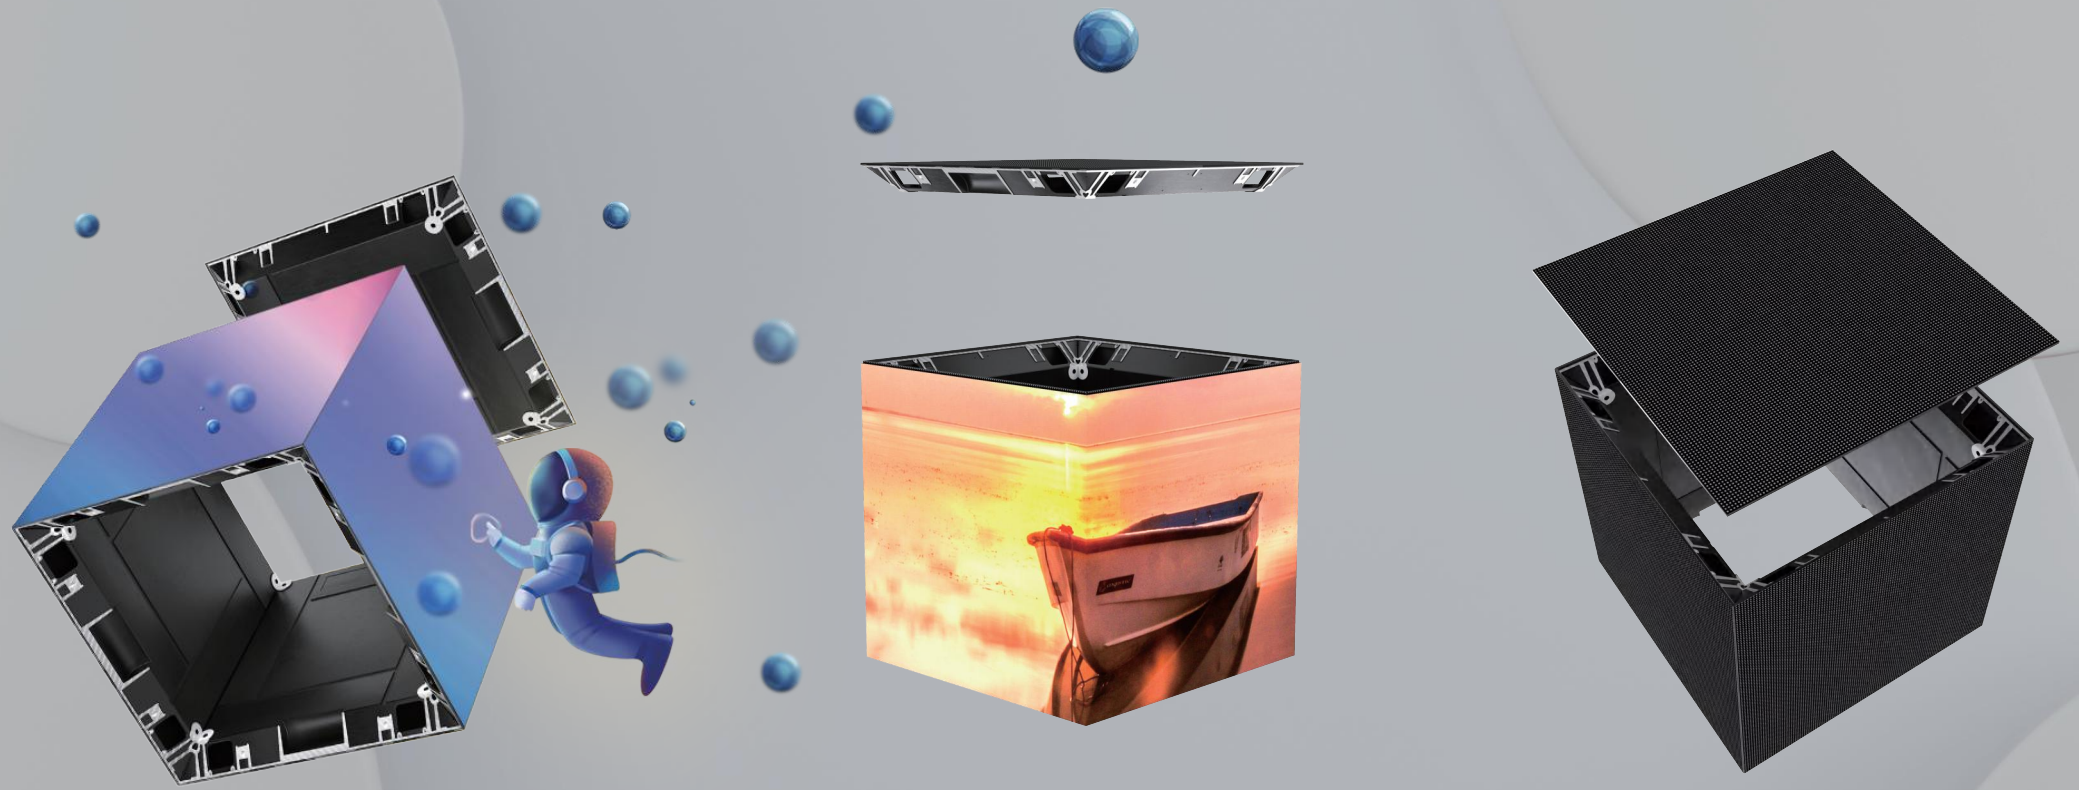


Mounting bracket

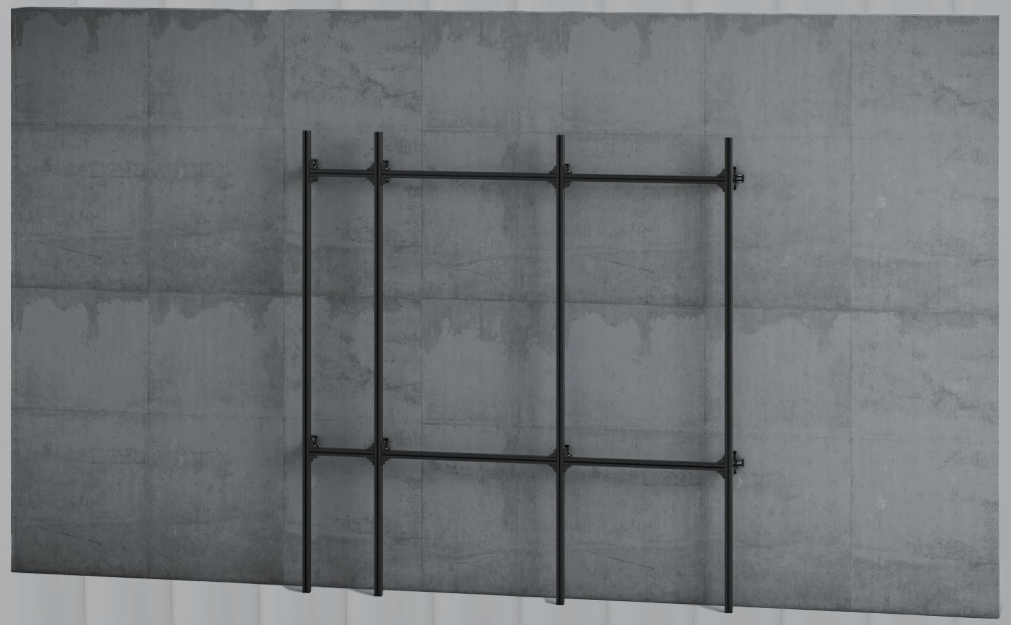




Wall mounting installation

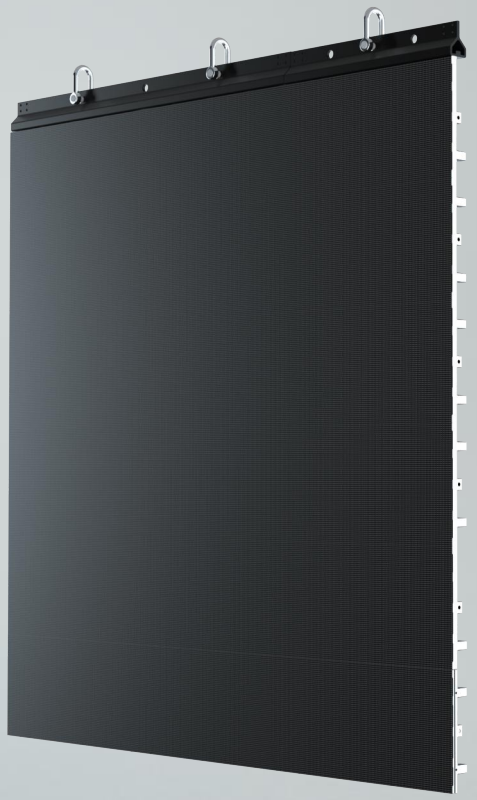





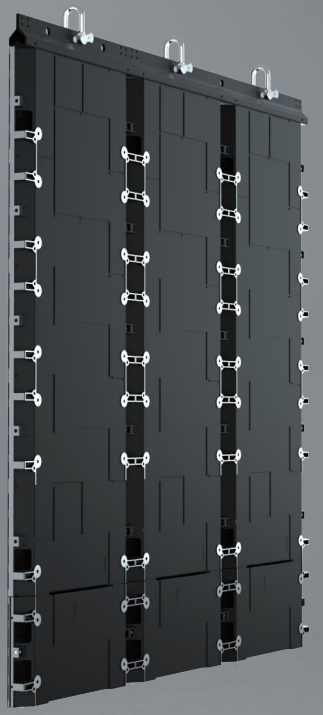

Hanging installation


The cabinet is installed out of position

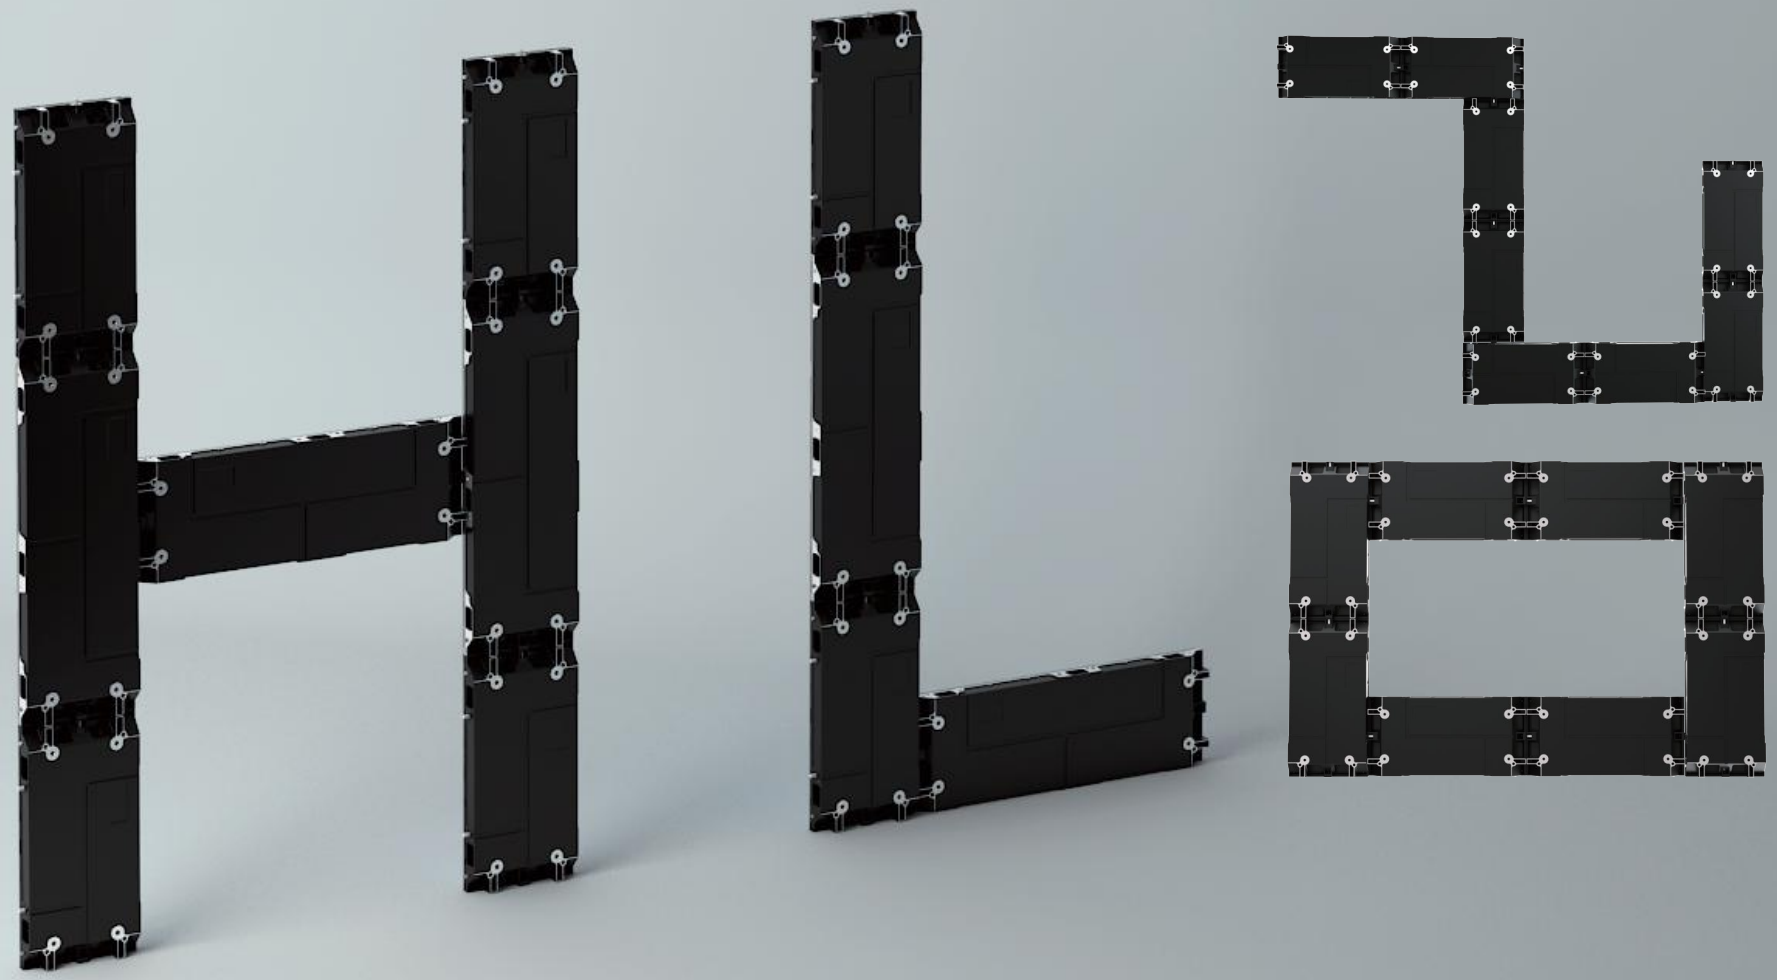

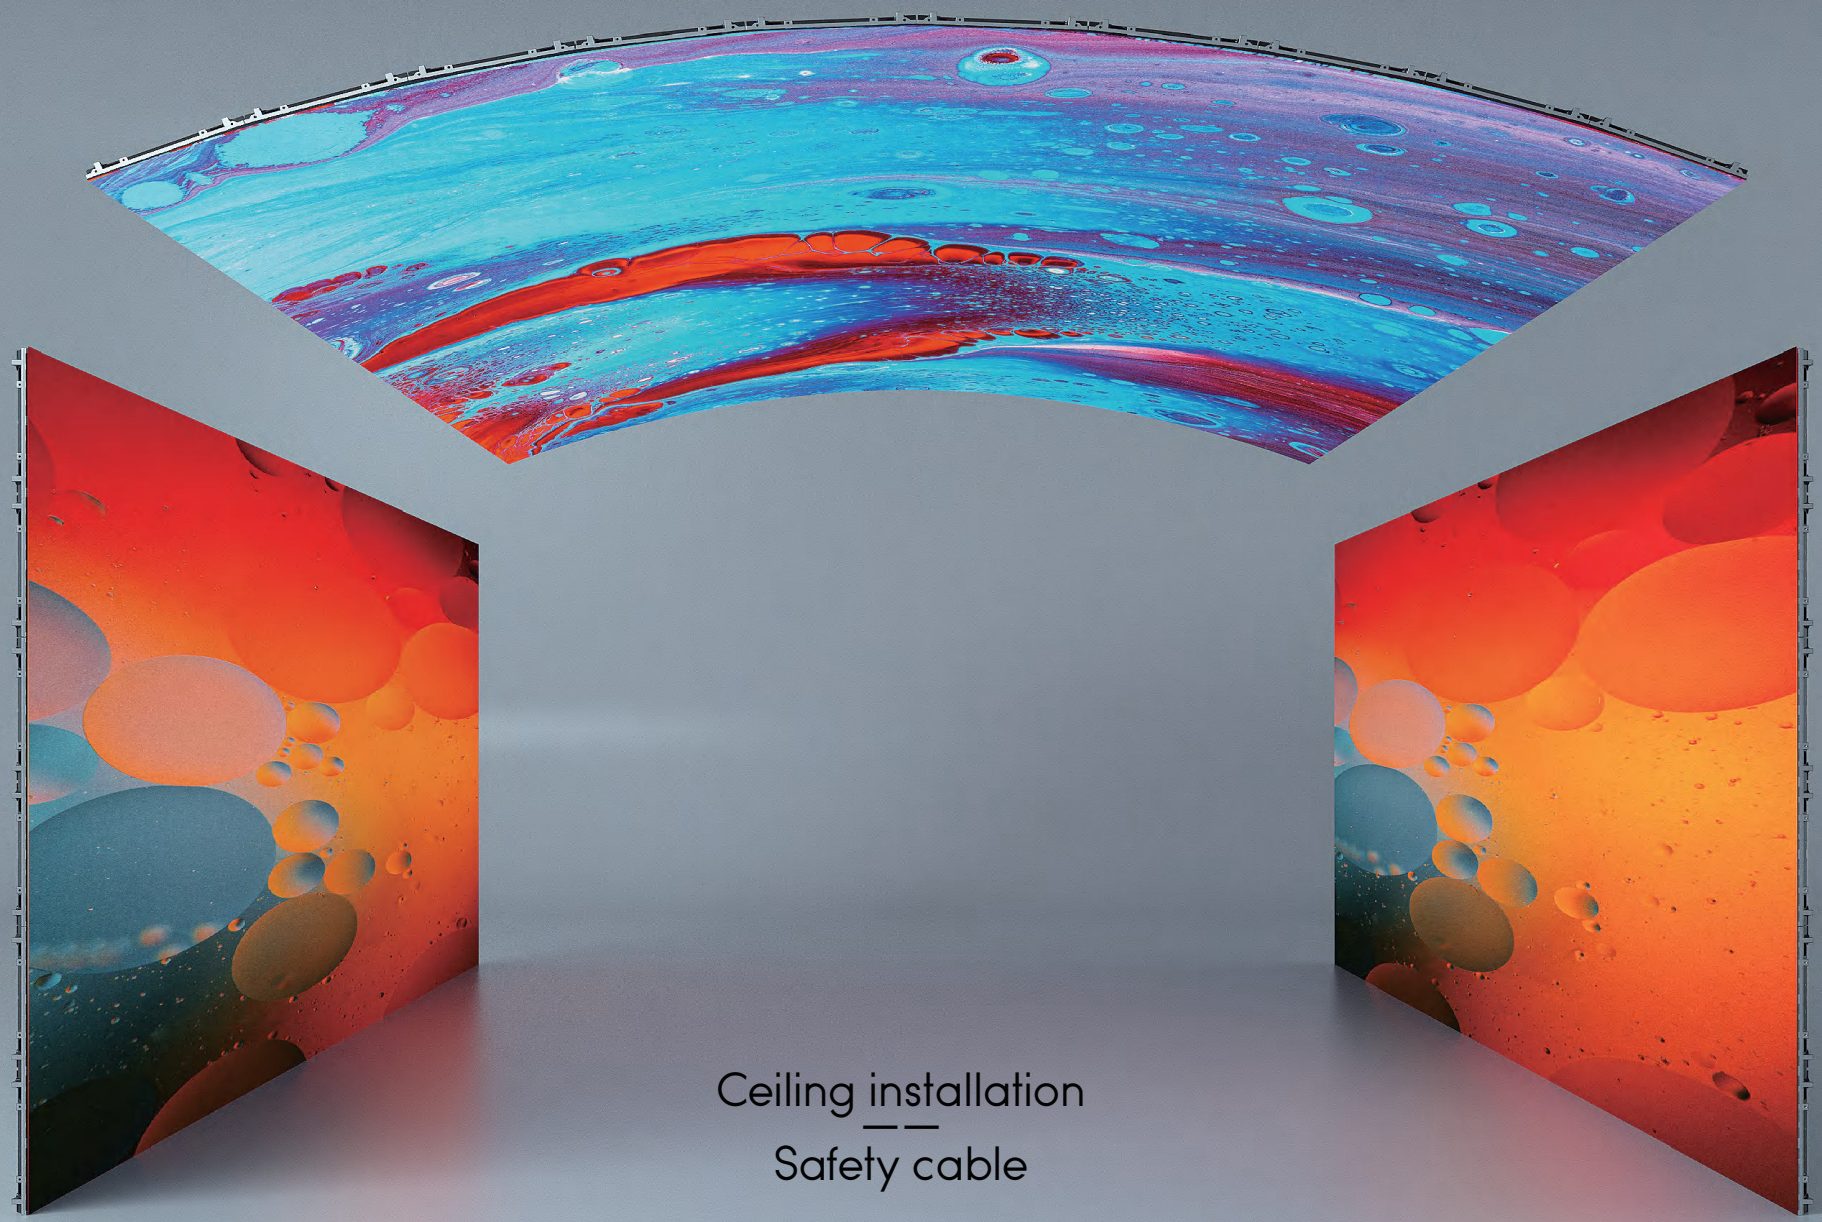


Ceiling installation

Safety cable

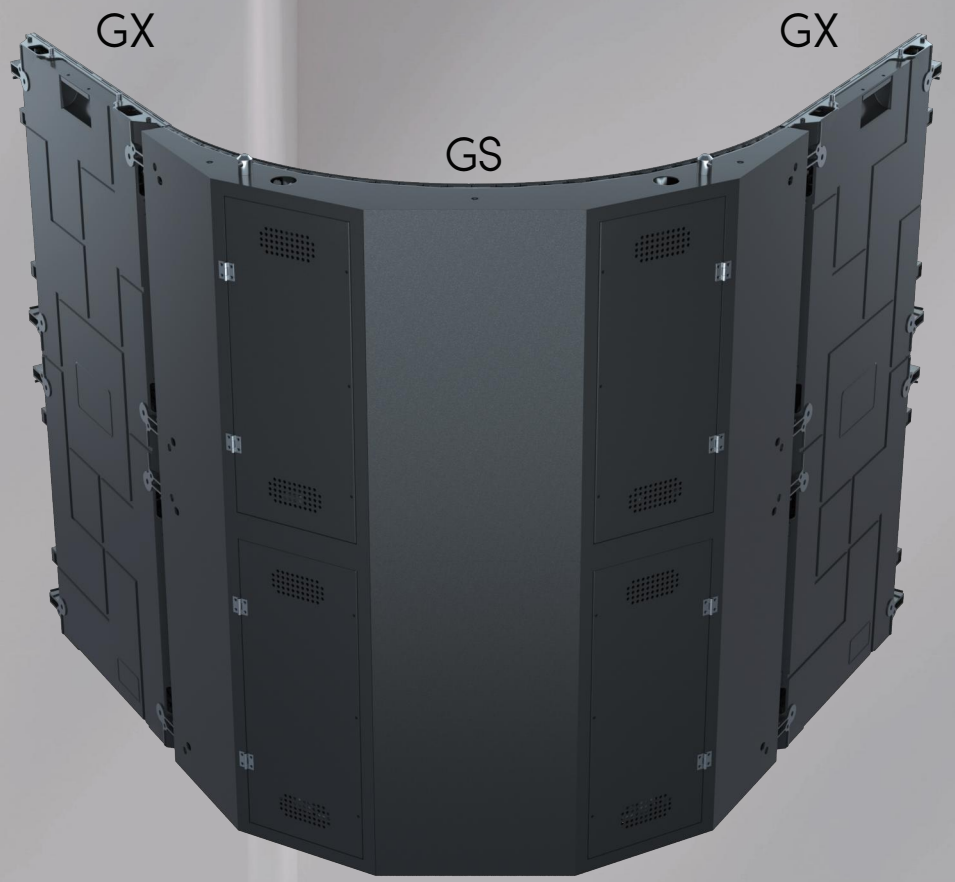

Seamless splicing
between Flat and Curved

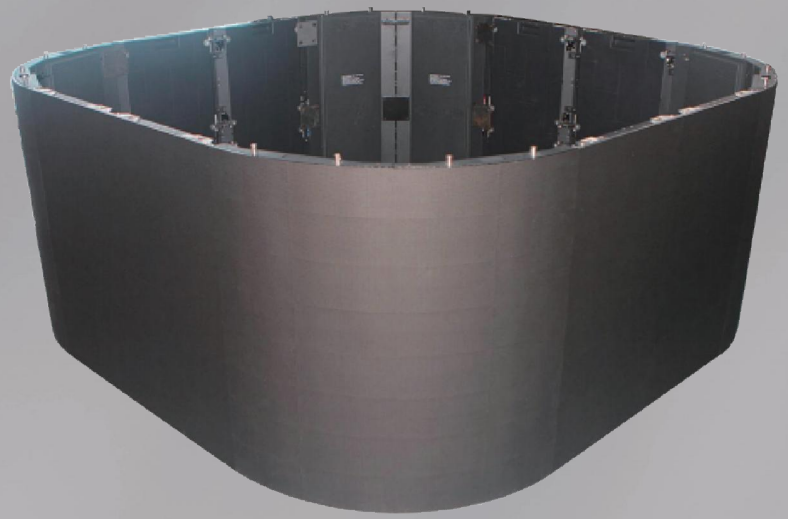


Quick installation

Cabinet with built-in positioning lock



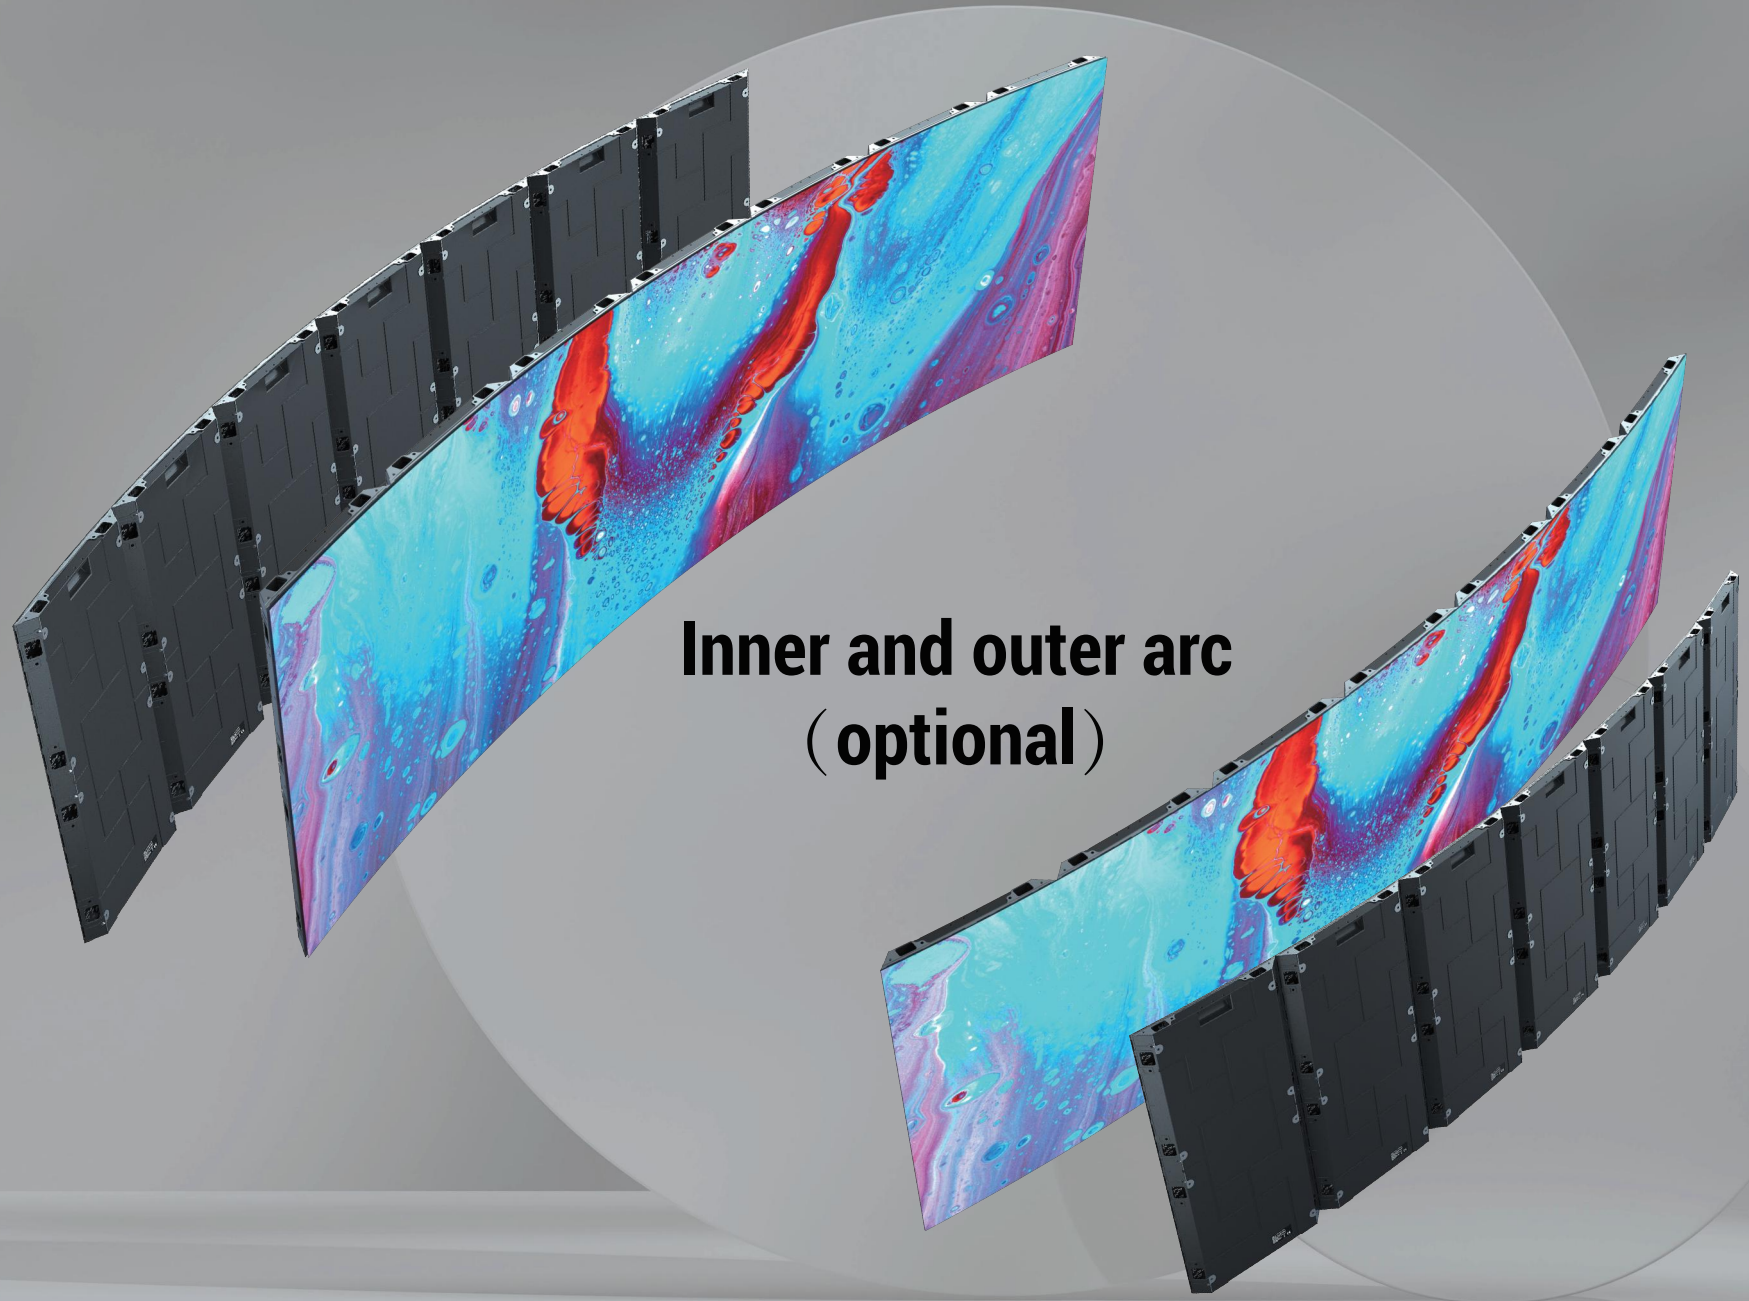


Inner and outer arc
（optional）




COT Protection（optional）

- Resistant to hot and cold shock
- High wear resistance
- High consistency
- High weather resistance
- High maintenance
- Affordable


High Brightness （optional）





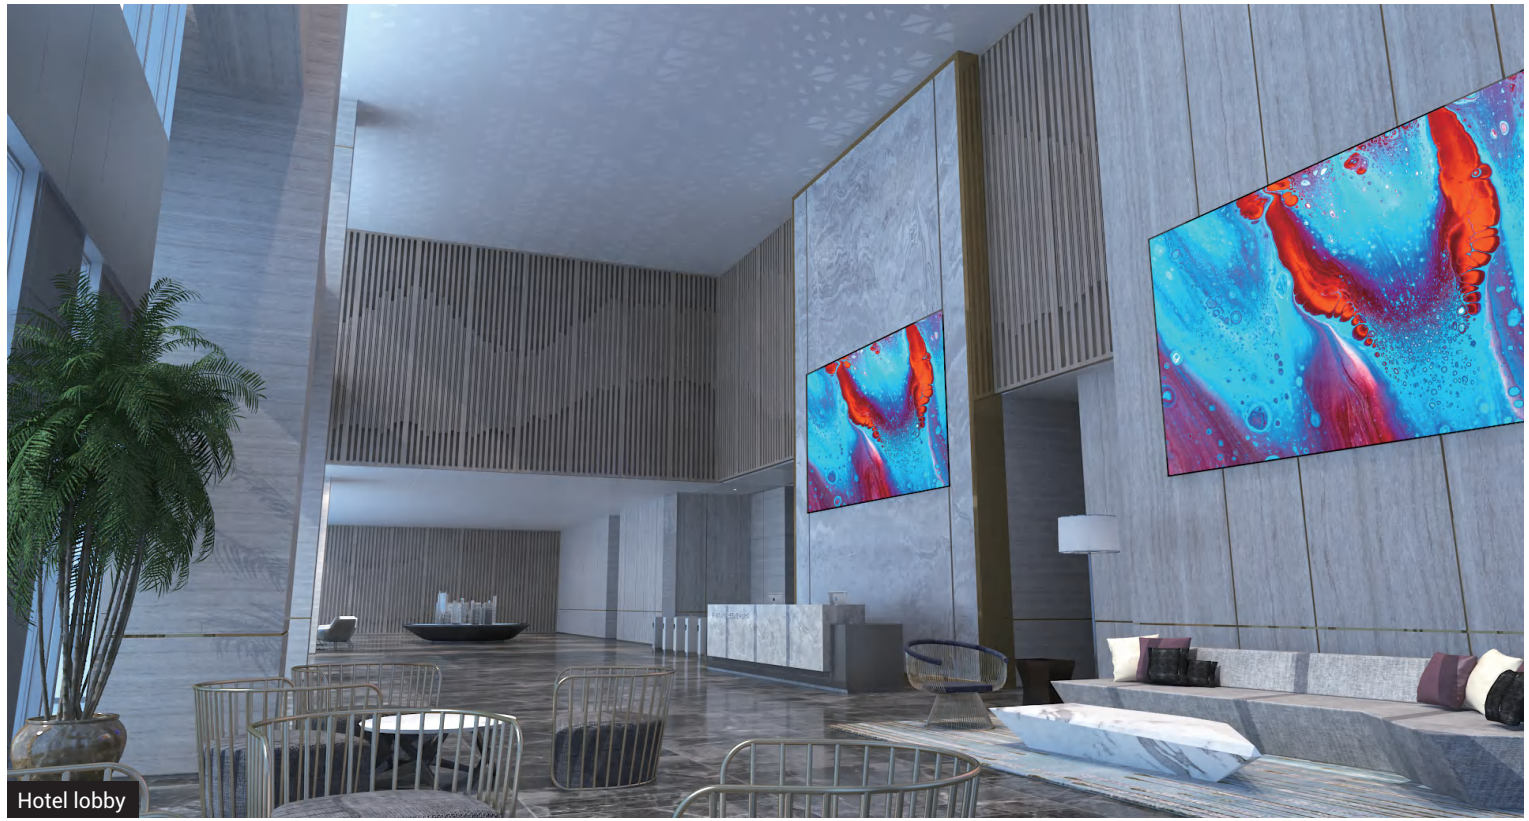

Hotel lobby

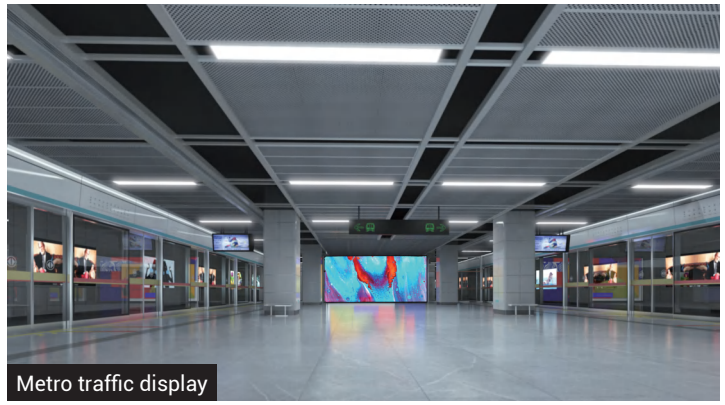

Metro traffic display



Event showroom



Large commercial complex

Parameters

Model	GX1.5	GX1.9	GX2.5	GX2.6	GX2.9	GX3.1	GX3.9	GX4.8	GX5.9	GX HB1.9	GX HB2.6	GX HB2.9	GX HB3.9
Pixel Pitch (mm)	1.562	1.953	2.500	2.604	2.976	3.125	3.906	4.807	5.952	1.953	2.604	2.976	3.906
LED Configuration	SMD1212(Black)	SMD1515(Black)	SMD1515/ SMD2020(Black)		SMD2020(Black)					SMD1516(White)		SMD1921(White)	
Adjustable Brightness (cd/m²)	600	800							600-800	3000			
Module Size (WxH mm)	250×250												
Module Resolution	160×160	128×128	100×100	96×96	84×84	80×80	64×64	52×52	42×42	96×96		84×84	64×64
Refresh Rate (Hz)	⩾3840												
Viewing Angle (H/V)	160°/140°									140°/140°			
Grayscale (Bit)	14												
Cabinet Size (WxHxD mm)	500×250×47 / 750×250×47 / 1000×250×47 / 500×500×47 / 500×750×47 / 500×1,000×47												
Cabinet Weight (kg/panel)	3.2 / 4.9 / 6 / 5.8 / 8 / 10.5												
Power Consumption (Max/Avg W/m²)	450/150									600/200			

* Technical specifications are subject to change without prior notice. Please contact our sales representative for the latest information

Taking Notes: